



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	12/31/15	MSC


Wall thickness must be 4 7/8" +/- 1/8"

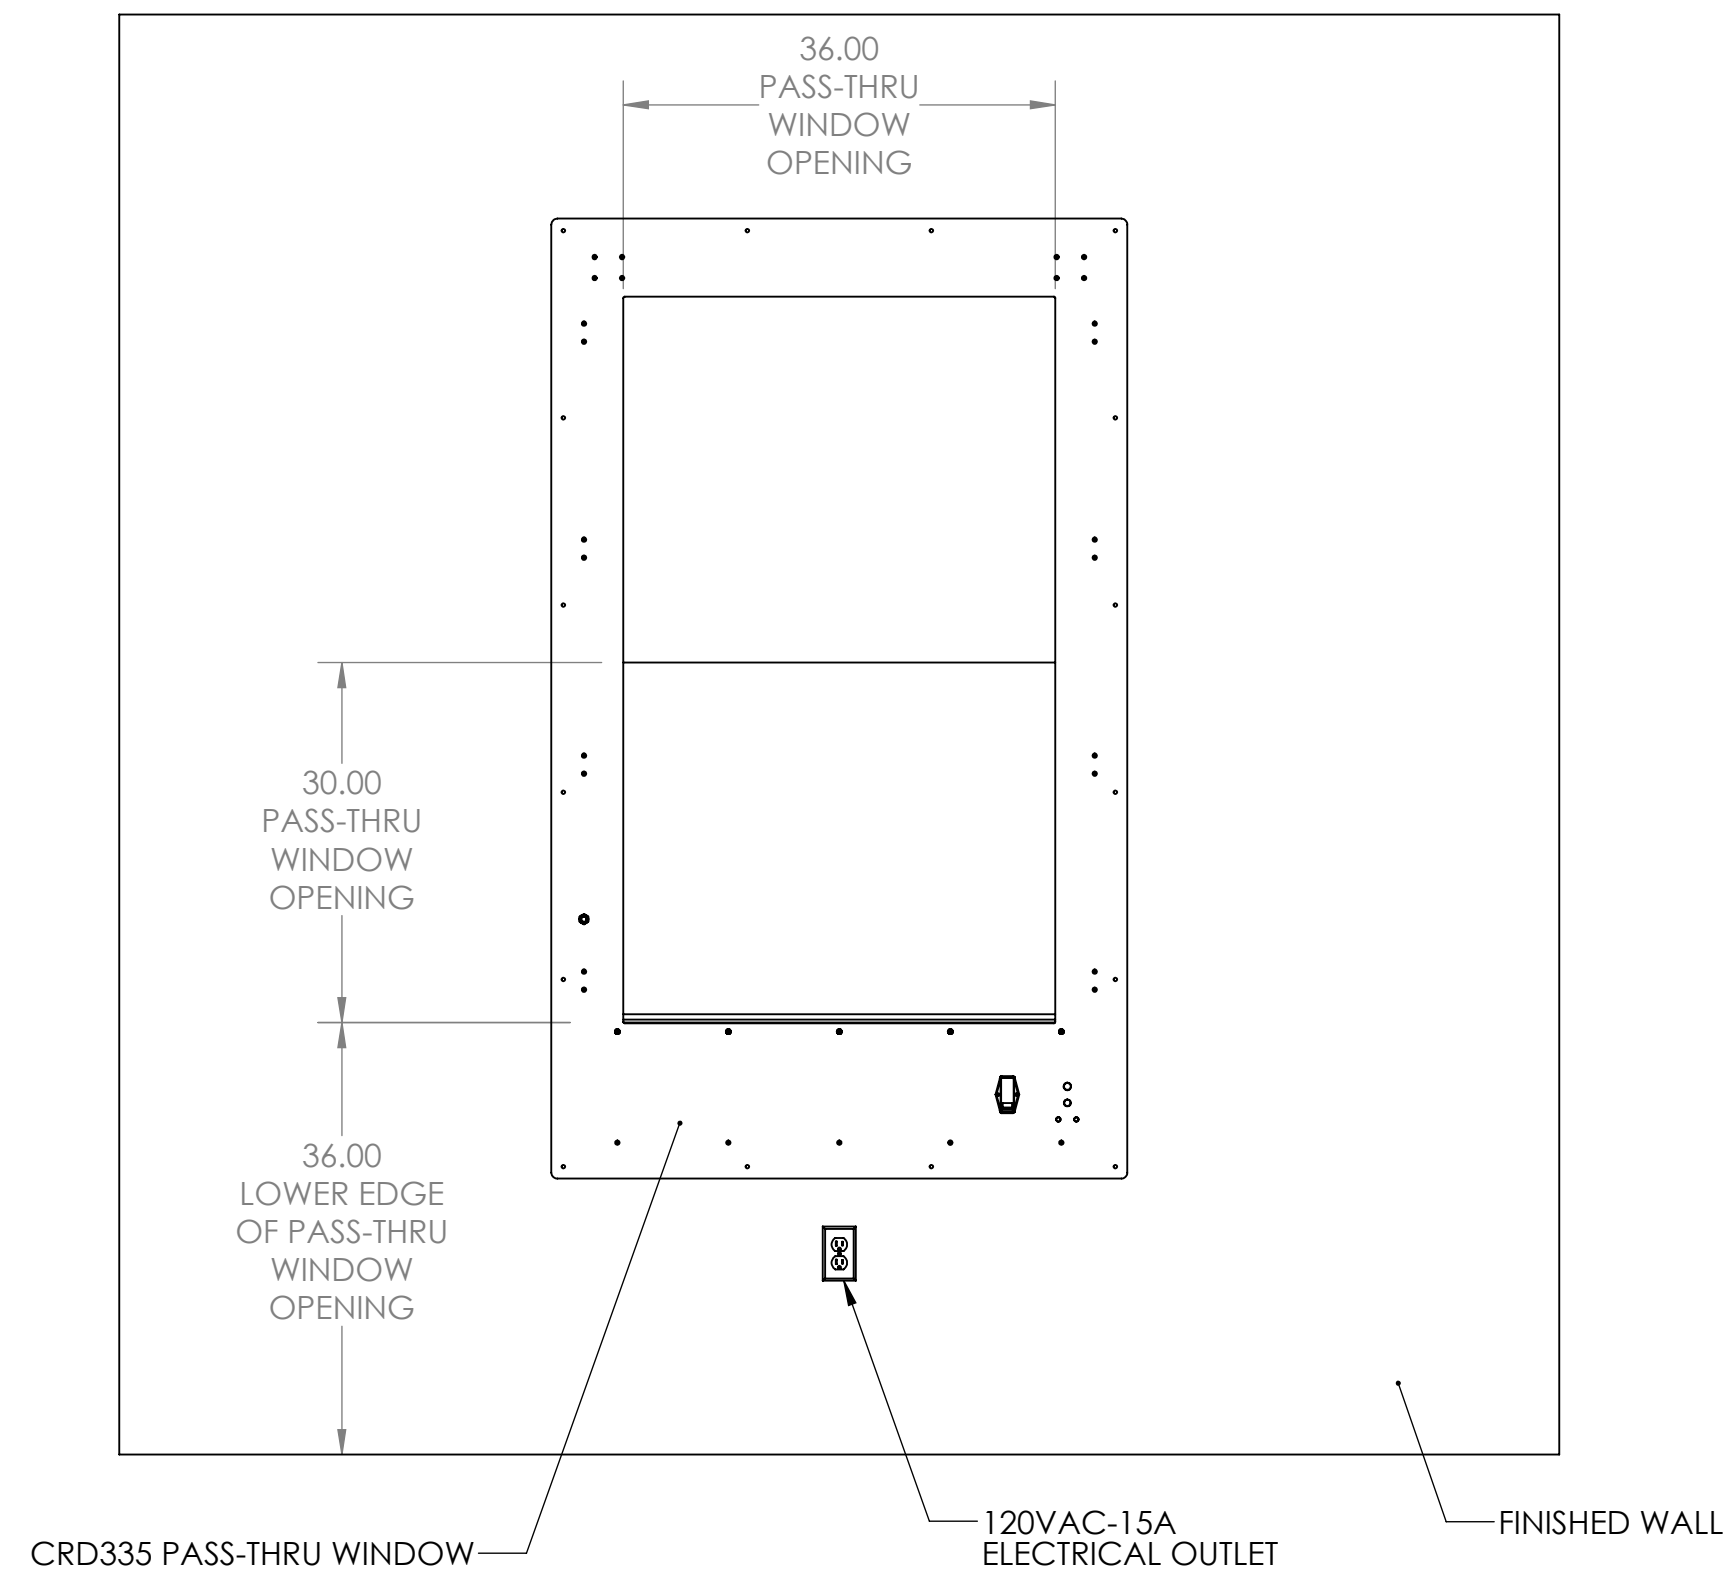

CLEAN ROOM SIDE

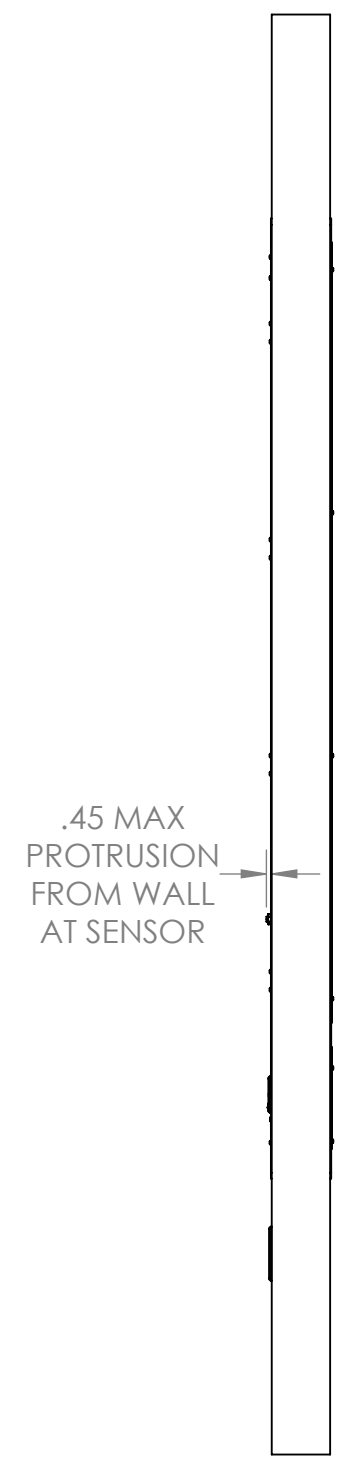

.45 MAX PROTRUSION FROM WALL AT SENSOR

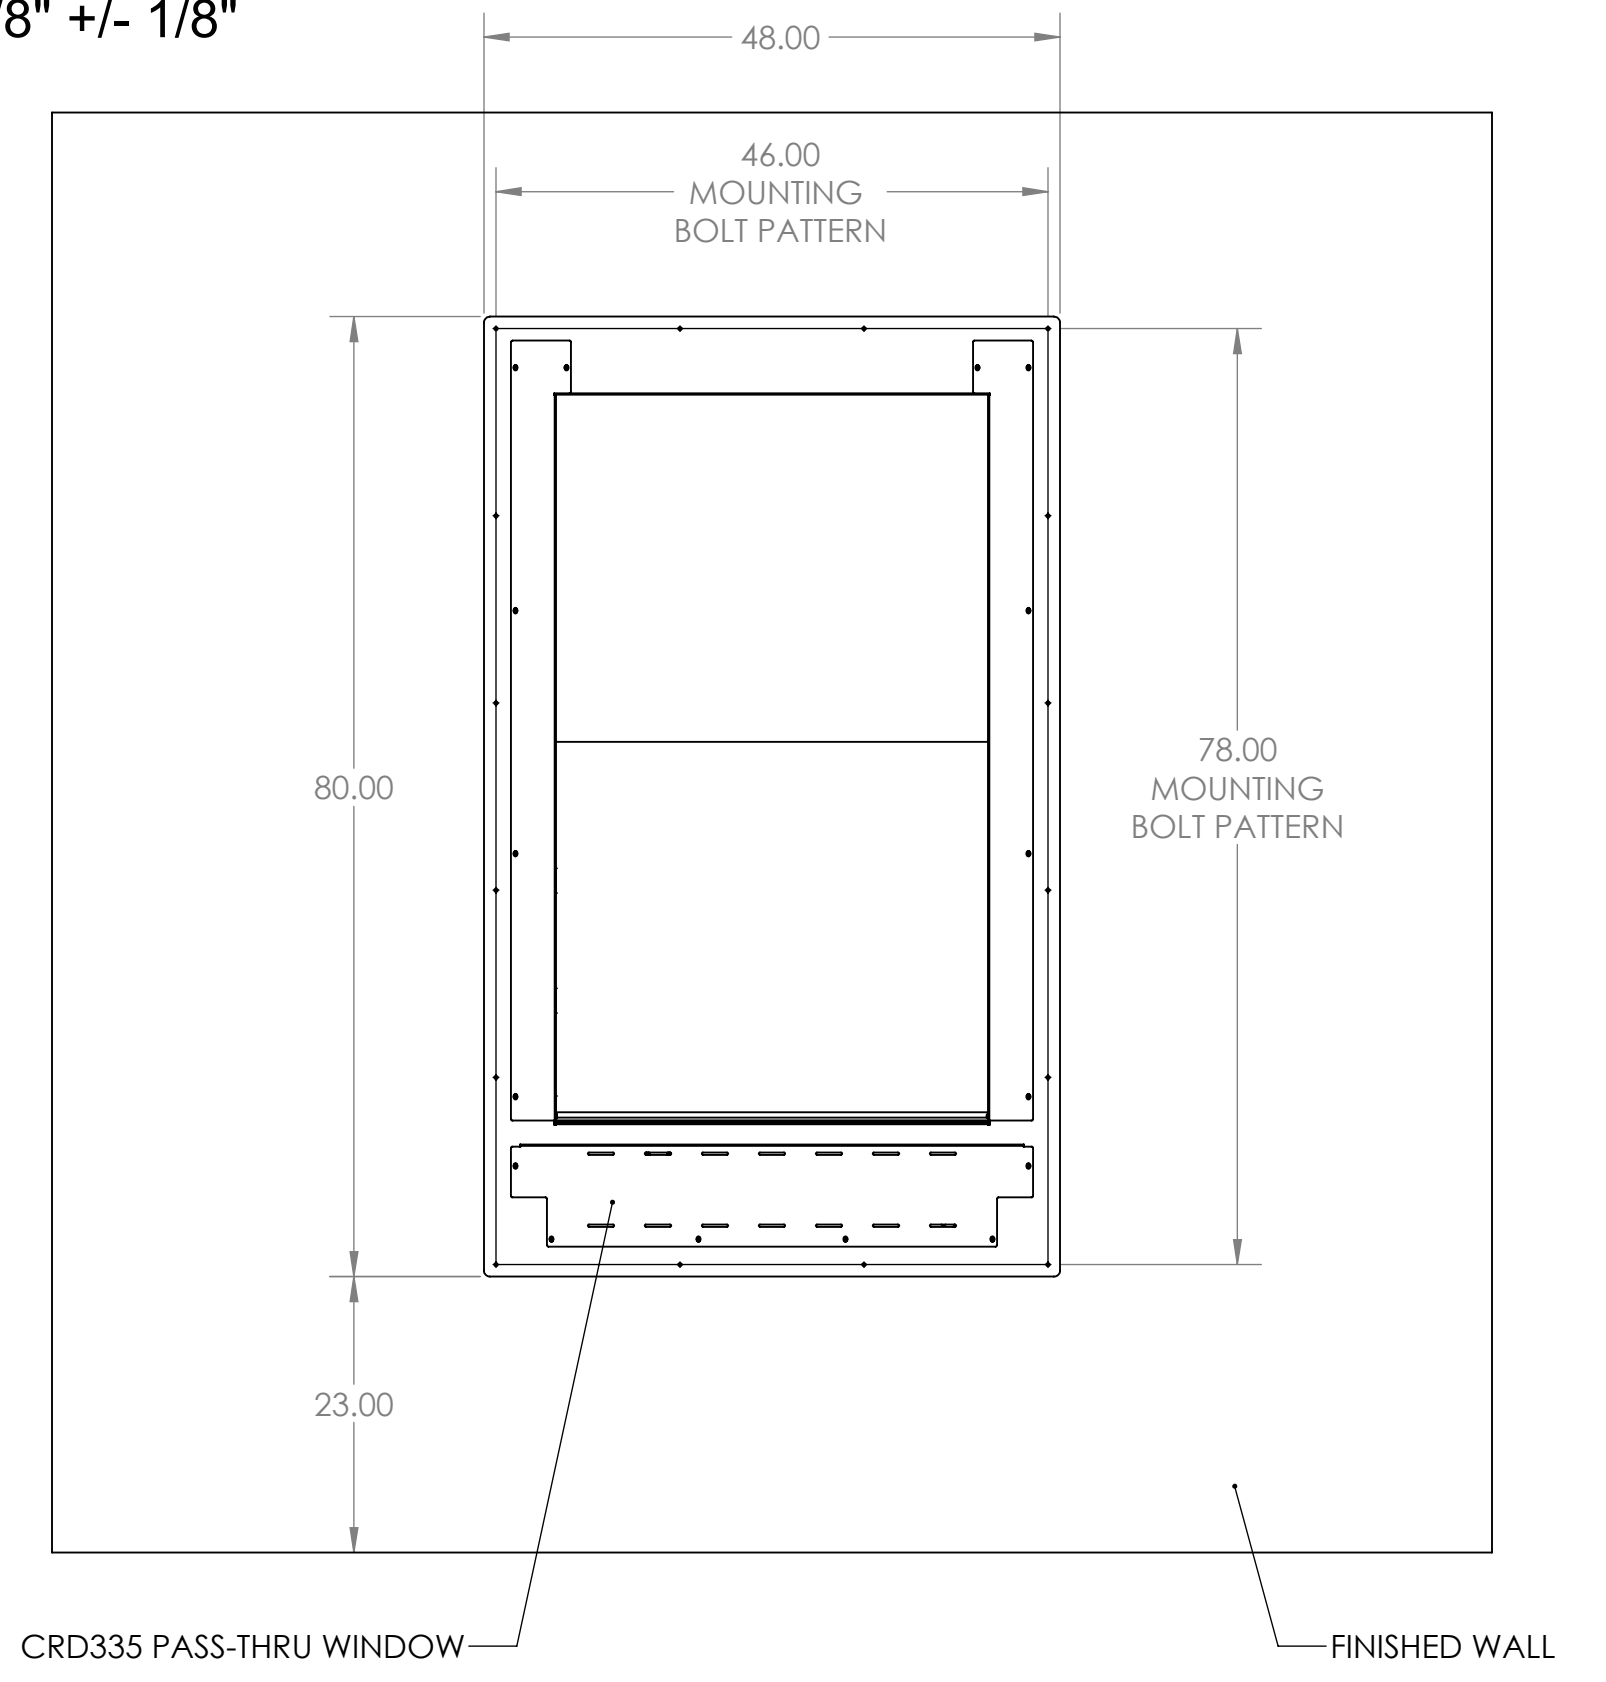

PACKAGING ROOM SIDE

- NOTES:
1. LOCATING BRACKET ON THE CRD335 PASS-THRU WINDOW SITS DIRECTLY ON THE LEDGE OF THE WALL OPENING, CENTER UNIT SIDE-TO-SIDE WITHIN THE WALL OPENING
 2. ATTACH CRD335 PASS-THRU WINDOW TO WALL USING 32X #14 TRUSS HEAD SHEET METAL SCREWS, #3 PHILLIPS DRIVE, 18-8 SS, .216" DIA X 1.5" LONG, McMASTER-CARR P/N 93406A318
 3. POWER FOR UNIT SHOULD BE 120VAC-15AMP CIRCUIT, 6-FOOT POWER CORD IS SUPPLIED

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CLEAN ROOM DEVICES, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CLEAN ROOM DEVICES, LLC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	CLEAN ROOM DEVICES, LLC INSTALLATION, CRD335
DIMENSIONS ARE IN INCHES		DRAWN	MSC	
TOLERANCES:		CHECKED		
FRACTIONAL ±1/16		ENG APPR.		
ANGULAR: MACHINED ±0.5°		MFG APPR.		
BEND ±2°		Q.A.		
TWO PLACE DECIMAL ±.01		COMMENTS:		
THREE PLACE DECIMAL ±.005				
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5				
MATERIAL				
SEE NOTES				
FINISH				
SEE NOTES				
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		

SIZE	DWG. NO.	REV
C	335-019	A
SCALE: 1:16 WEIGHT:		SHEET 1 OF 1