



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	5/7/16	MSC

Wall thickness must be 4 7/8" +/- 1/8"

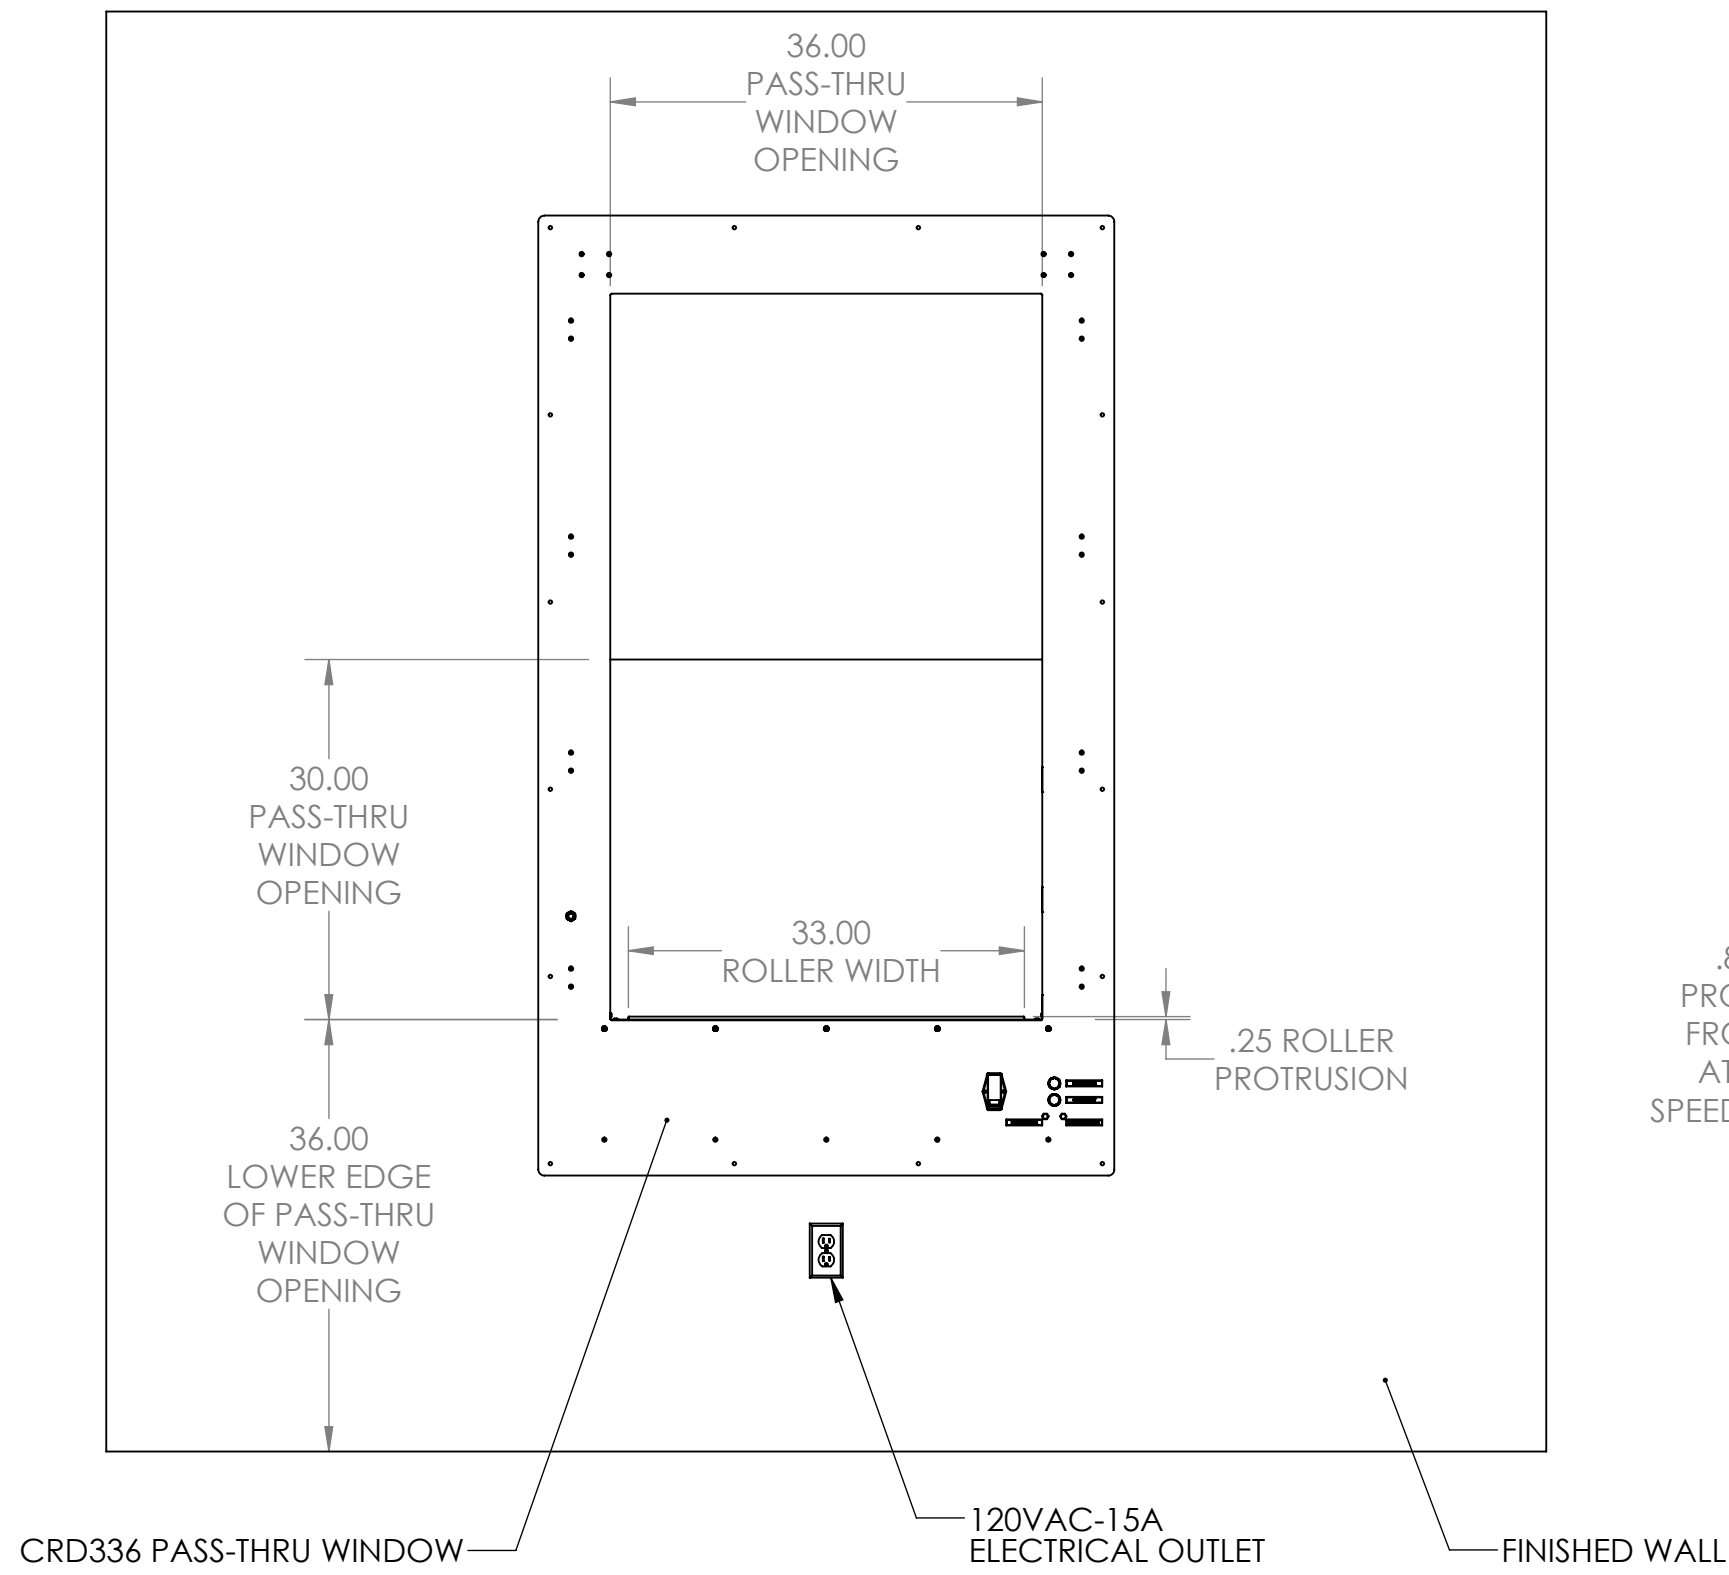

CLEAN ROOM SIDE

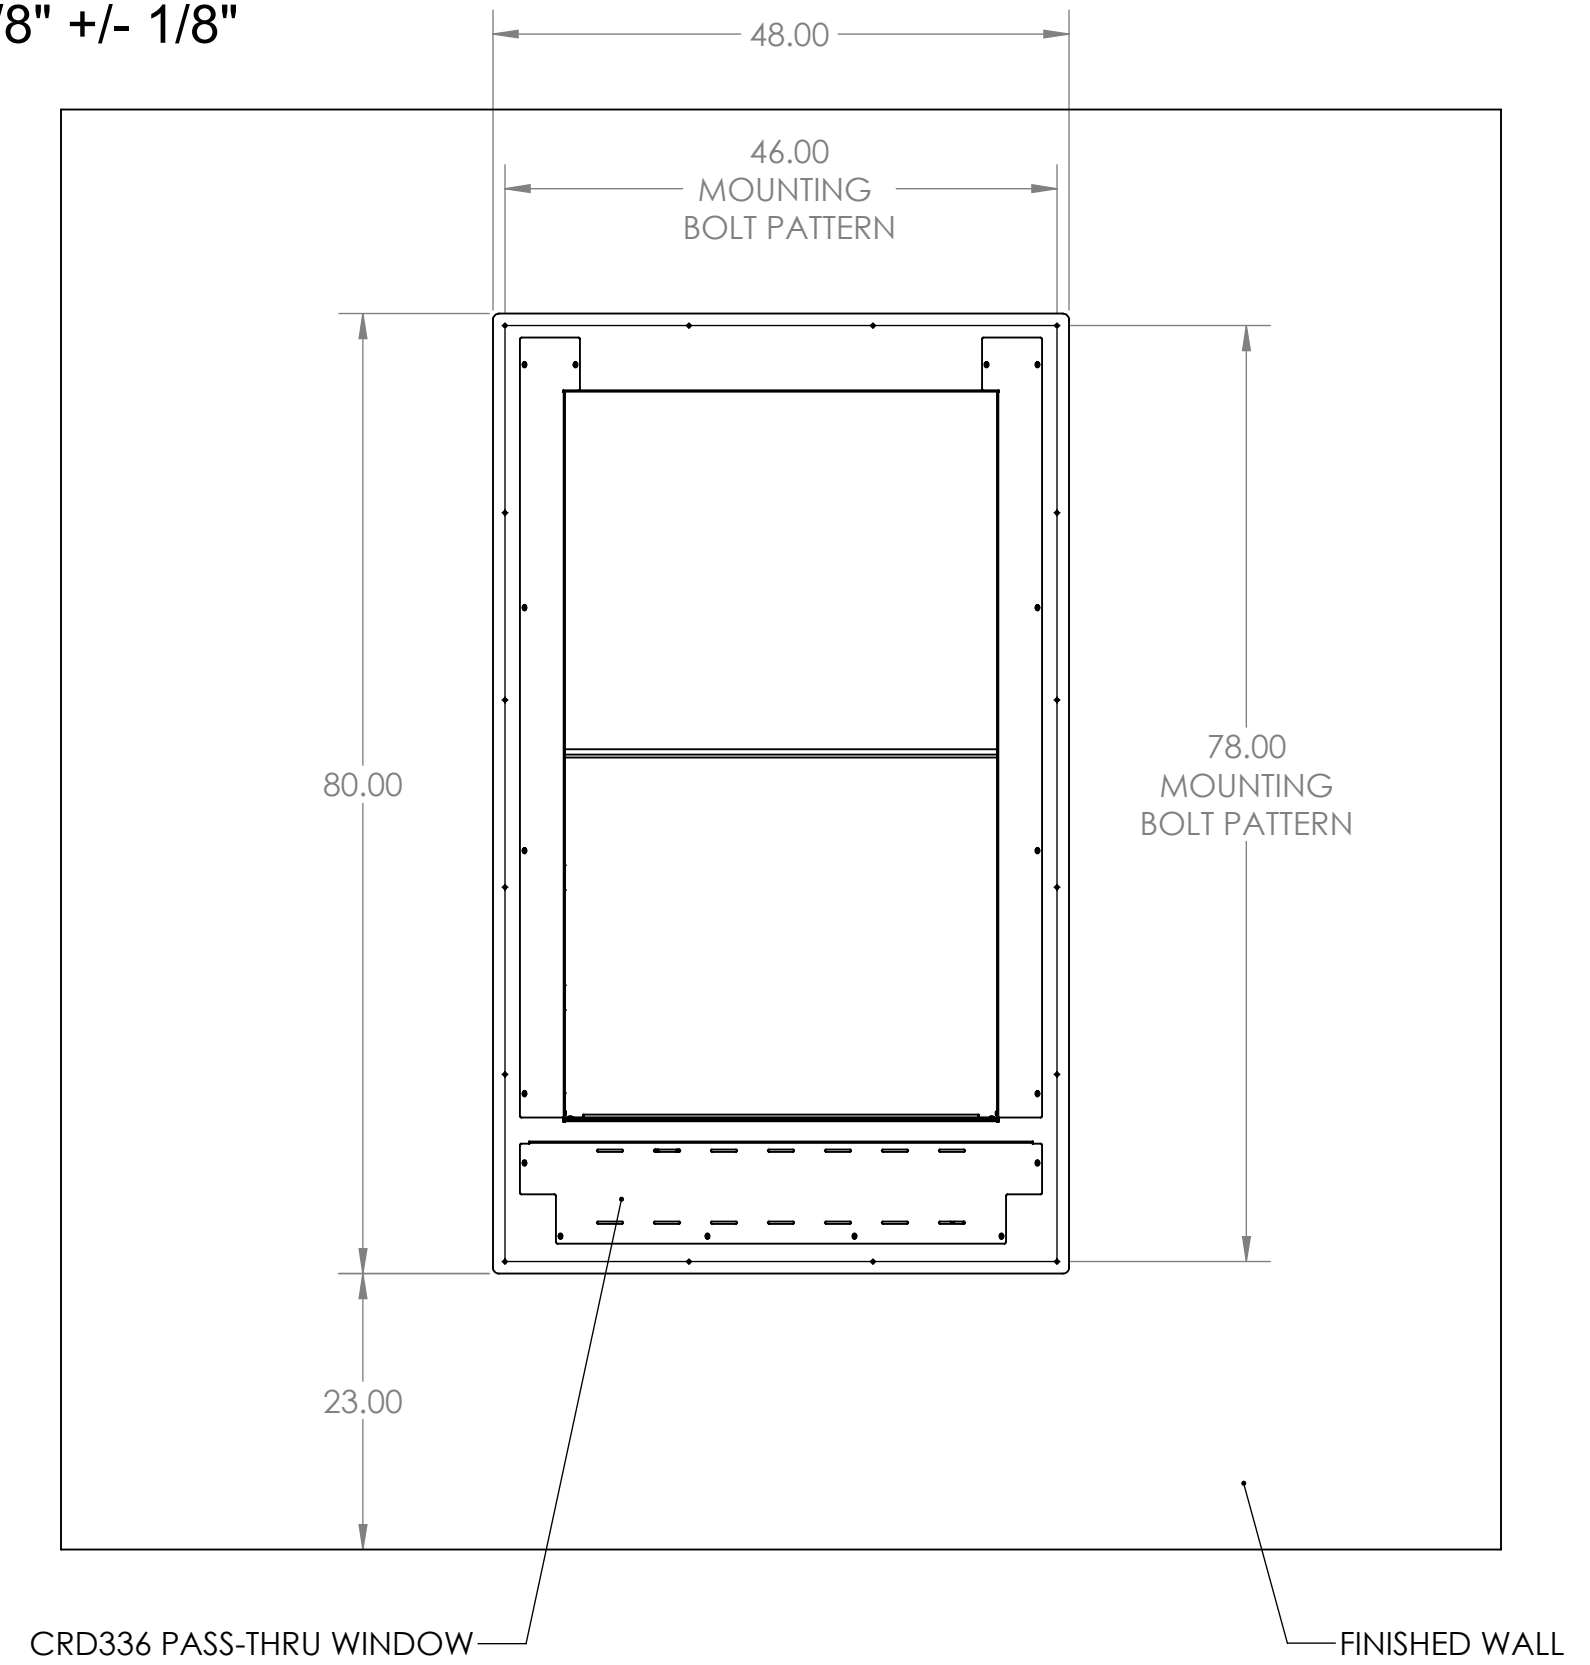

PACKAGING ROOM SIDE

- NOTES:
- LOCATING BRACKET ON THE CRD336 PASS-THRU WINDOW SITS DIRECTLY ON THE LEDGE OF THE WALL OPENING, CENTER UNIT SIDE-TO-SIDE WITHIN THE WALL OPENING
  - ATTACH CRD336 PASS-THRU WINDOW TO WALL USING 32X #14 TRUSS HEAD SHEET METAL SCREWS, #3 PHILLIPS DRIVE, 18-8 SS, .216" DIA X 1.5" LONG, McMASTER-CARR P/N 93406A318
  - POWER FOR UNIT SHOULD BE 120VAC-15AMP CIRCUIT, 6-FOOT POWER CORD IS SUPPLIED

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CLEAN ROOM DEVICES, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CLEAN ROOM DEVICES, LLC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	CLEAN ROOM DEVICES, LLC
DIMENSIONS ARE IN INCHES		DRAWN	MSC	
TOLERANCES:		CHECKED		TITLE: <b>INSTALLATION, CRD336</b>
FRACTIONAL ±1/16		ENG APPR.		
ANGULAR: MACHINED ±0.5° BEND ±2°		MFG APPR.		
TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005		Q.A.		SIZE DWG. NO. REV <b>C 336-002 A</b>
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5		COMMENTS:		
MATERIAL				SCALE: 1:16 WEIGHT: SHEET 1 OF 1
FINISH				
NEXT ASSY	USED ON	SEE NOTES		
APPLICATION		DO NOT SCALE DRAWING		